



KÖSTER Roof Drain (Hard-PE) D 90

Technical Data Sheet RT 915 021

Issued: 2026-07-02

Features

- Excellent weather stability (UV/IR radiation)
- Resistant to the usual environmental influences
- Shock and impact resistant
- Durable
- Outstanding functionality thanks to tested, standard-compliant drainage values
- DIN EN 12056 Part 3 - Roof drainage systems
- DIN 1986 Part 100 - Drainage systems for buildings and properties
- DIN EN 1253 - Drains for buildings
- DIN 18531 - Waterproofing for roofs not in use
- DIN 18195 / 18332 ff - Waterproofing of buildings
- optionally with leaf guard

Material: Hart-PE

Color: light grey

Drainage performance liter/Sec.:



Article number	Accumulation height	
Diameter	35 mm	65 mm
RT 915 021 / (D90)	5,3	14,6

Application

Please refer to the TPO Installation Instructions and the Technical Manual for TPO of KÖSTER BAUCHEMIE AG for correct application of KÖSTER TPO Roofing and Waterproofing Membranes.

Safety

Observe all local, State, and Governmental safety guidelines when installing the membrane.

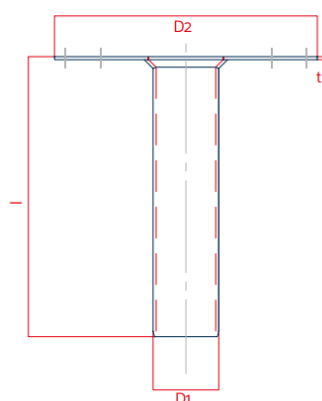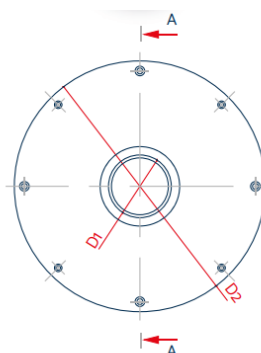

Technical Specifications [mm]		
D1	90	
D2	380	
l	320*	
t	3,5	
*Special lengths available upon request		

The information contained in this technical data sheet is based on the results of our research and on our practical experience in the field. All given test data are average values which have been obtained under defined conditions. The proper and thereby effective and successful application of our products is not subject to our control. The installer is responsible for the correct application under consideration of the specific conditions of the construction site and for the final results of the construction process. This may require adjustments to the recommendations given here for standard cases. Specifications made by our employees or representatives which exceed the specifications contained in this technical guideline require written confirmation. The valid standards for testing and installation, technical guidelines, and acknowledged rules of technology have to be adhered to at all times. The warranty can and is therefore only applied to the quality of our products within the scope of our terms and conditions, not however, for their effective and successful application. This guideline has been technically revised; all previous versions are invalid.

KÖSTER BAUCHEMIE AG • Dieselstraße 1-10 • D-26607 Aurich • Tel. 04941/9709-0 • info@koester.eu • www.koester.eu